


MALENA CERAMIC TILE



MALENA CERAMIC TILE



3" x 10" MALENA IVORY CERAMIC BULLNOSE
56-053



3" x 13" MALENA IVORY CERAMIC BULLNOSE
46-169



10" x 16" MALENA IVORY CERAMIC WALL TILE
56-052



13" x 13" MALENA IVORY CERAMIC FLOOR TILE
46-168




8" x 10" MALENA IVORY CERAMIC
WALL TILE 52-191



2" x 2" MALENA IVORY MOSAICS
46-172

MALENA CERAMIC TILE



3' x 10' MALENA ICE CERAMIC BULLNOSE
56-049



3' x 13' MALENA ICE CERAMIC BULLNOSE
46-165



10' x 16' MALENA ICE CERAMIC WALL TILE
56-048



13' x 13' MALENA ICE CERAMIC FLOOR TILE
46-164



8' x 10' MALENA ICE CERAMIC
WALL TILE 52-189



2' x 2' MALENA ICE MOSAICS
46-170

MALENA CERAMIC TILE




3' x 10' MALENA CARBON CERAMIC BULLNOSE
56-051



3' x 13' MALENA CARBON CERAMIC BULLNOSE
46-167




10' x 16' MALENA CARBON CERAMIC WALL TILE
56-050

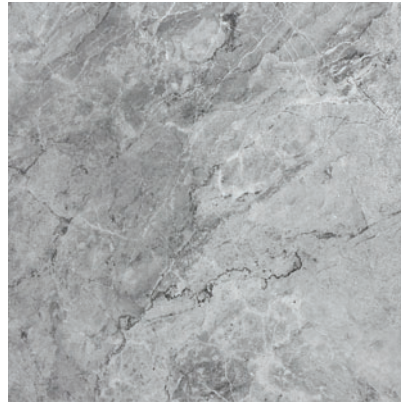

13' x 13' MALENA CARBON CERAMIC FLOOR TILE
46-166



8' x 10' MALENA CARBON CERAMIC
WALL TILE 52-190

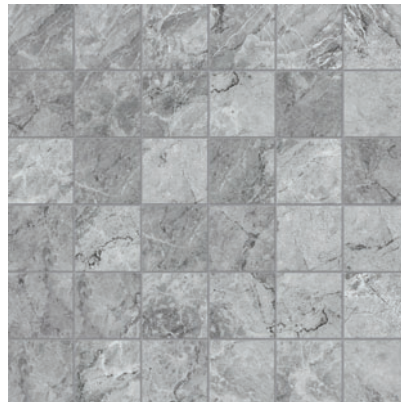

2' x 2' MALENA CARBON MOSAICS
46-171

MALENA CERAMIC TILE

PACKAGING INFORMATION

DESCRIPTION	ITEM CODE			LBS/BOX	PCS/BOX	SQFT/BOX	BOXES/SKID	SQFT/SKID
	IVORY	ICE	CARBON					
13" x 13" MALENA CERAMIC FLOOR TILE	46-168	46-164	46-166	44.22	11	12.912	58	748.9
8" x 10" MALENA CERAMIC WALL TILE	52-191	52-189	52-190	27.2	20	10.76	92	989.92
10" x 16" MALENA CERAMIC WALL TILE	56-052	56-048	56-050	43.4	14	15.064	48	723.072
2" x 2" MALENA MOSAICS	46-172	46-170	46-171	40	10	11.74	48	563.52
3" x 13" MALENA CERAMIC BULLNOSE	46-169	46-165	46-167	20.48	21	N/A	84	1764 pcs.
3" x 10" MALENA CERAMIC BULLNOSE	56-053	56-049	56-051	13.40	25	N/A	98	2450 pcs.

GENERAL SPECIFICATIONS

DESCRIPTION	METHOD	UNIT	13" x 13"
THICKNESS		mm – in	7.6 mm – 5/16 in
WATER ABSORPTION	EN ISO 10545-3	(%)	≤ 3
ABRASION RESISTANCE	EN ISO 10545-7	(PEI)	4
SCRATCH HARDNESS		(Mohs)	6
BREAKING STRENGTH	EN ISO 10545-4	(lbf)	≥ 250
CHEMICAL RESISTANCE	EN ISO 10545-13	(GL)	Class A – Resistant
FROST RESISTANCE	EN ISO 10545-12		Resistant
STATIC COEFFICIENT OF FRICTION (WET)	ASTM C-1028	(μ)	< 0.60
STATIC COEFFICIENT OF FRICTION (DRY)	ASTM C-1028	(μ)	≥ 0.80
DCOF (WET)	ANSI B101.3		< 0.42
SHADE VARIATION			V2