


AMAYA WOOD HD PORCELAIN TILE



AMAYA WOOD HD PORCELAIN TILE

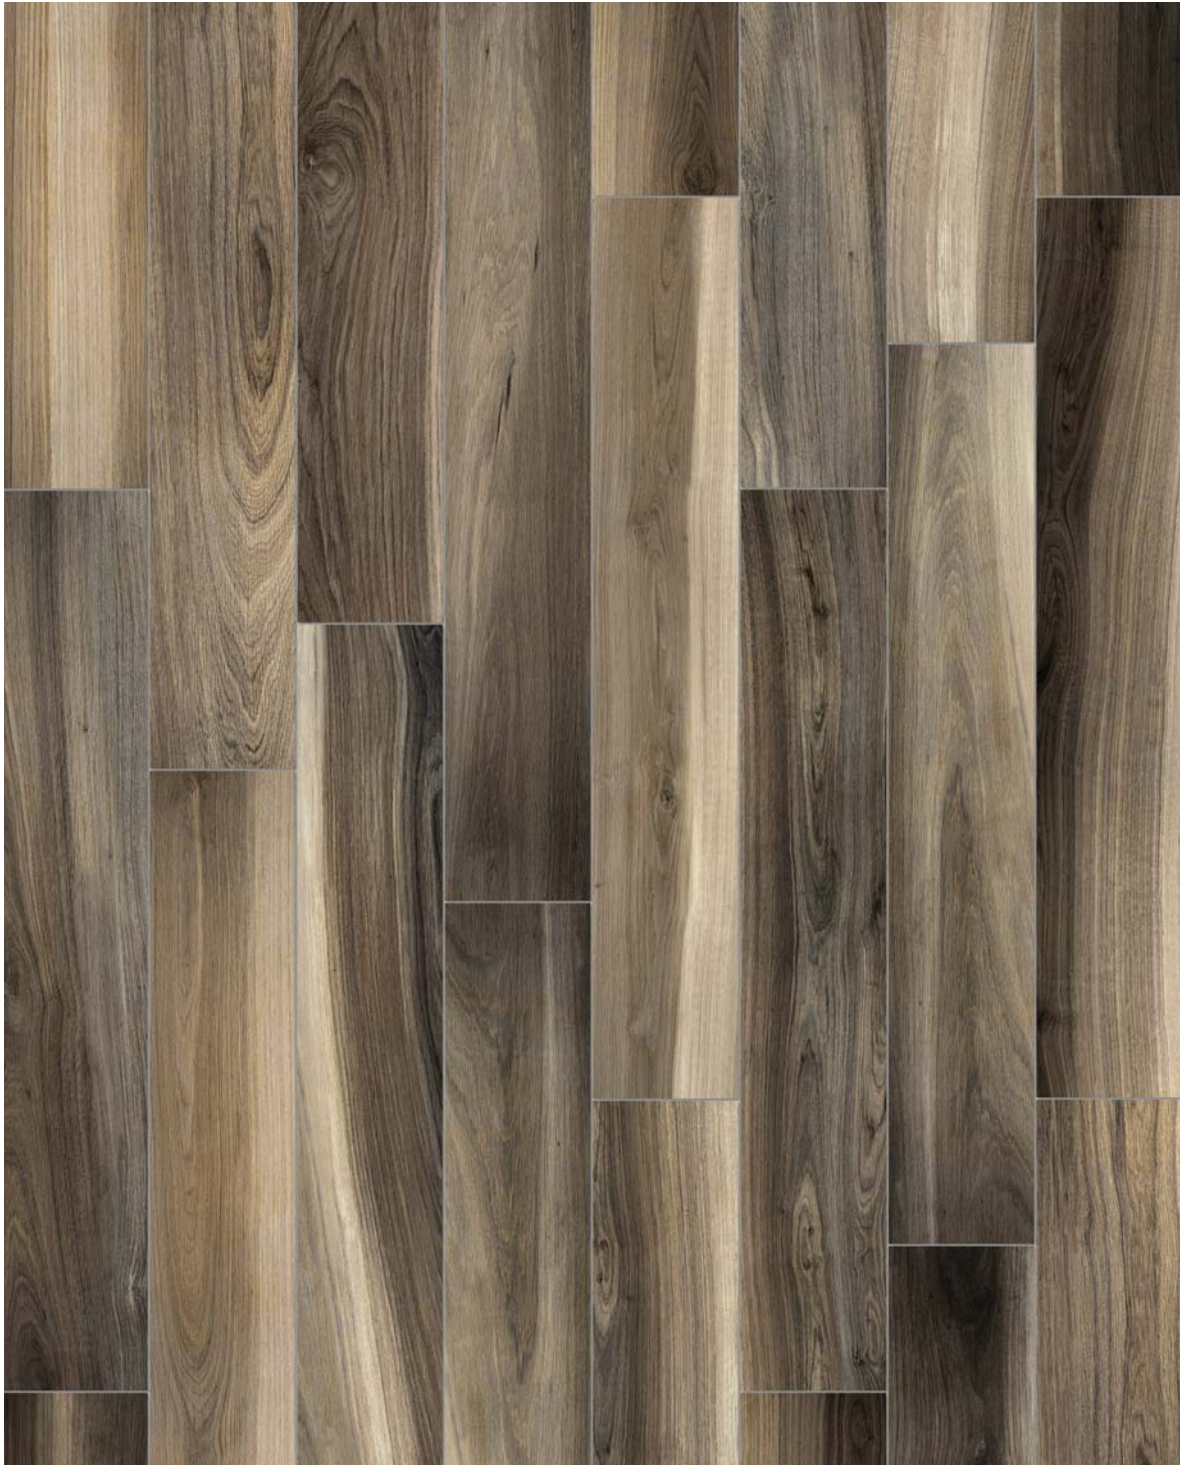

6" x 36" AMAYA WOOD TOBACCO HD PORCELAIN TILE

AMAYA WOOD HD PORCELAIN TILE



6" x 36" AMAYA WOOD WALNUT HD PORCELAIN TILE

AMAYA WOOD HD PORCELAIN TILE



6" x 36" AMAYA WOOD BLEND HD PORCELAIN TILE

AMAYA WOOD HD PORCELAIN TILE



6" x 36" AMAYA WOOD TOBACCO HD PORCELAIN TILE
62-732



6" x 24" AMAYA WOOD TOBACCO HD PORCELAIN TILE
62-533



6" x 36" AMAYA WOOD WALNUT HD PORCELAIN TILE
62-733



6" x 24" AMAYA WOOD WALNUT HD PORCELAIN TILE
62-534



6" x 36" AMAYA WOOD BLEND HD PORCELAIN TILE
62-734



6" x 24" AMAYA WOOD BLEND HD PORCELAIN TILE
62-535

AMAYA WOOD HD PORCELAIN TILE



6" x 36" AMAYA WOOD NATURAL HD PORCELAIN TILE
62-735



6" x 24" AMAYA WOOD NATURAL HD PORCELAIN TILE
62-536



6" x 36" AMAYA WOOD ASH HD PORCELAIN TILE
62-736



6" x 24" AMAYA WOOD ASH HD PORCELAIN TILE
62-537

AMAYA WOOD HD PORCELAIN TILE



6" x 36" AMAYA WOOD NATURAL HD PORCELAIN TILE

AMAYA WOOD HD PORCELAIN TILE



6" x 36" AMAYA WOOD ASH HD PORCELAIN TILE

AMAYA WOOD HD PORCELAIN TILE

PACKAGING INFORMATION

DESCRIPTION	ITEM CODE					LBS/BOX	PCS/BOX	SQFT/BOX	BOXES/SKID	SQFT/SKID
	TOBACCO	WALNUT	BLEND	NATURAL	ASH					
6" x 36" AMAYA WOOD HD PORCELAIN TILE	62-732	62-733	62-734	62-735	62-736	45.46	8	12	39	468.00
6" x 24" AMAYA WOOD HD PORCELAIN TILE	62-533	62-534	62-535	62-536	62-537	55.40	14	14	40	560.00

GENERAL SPECIFICATIONS

DESCRIPTION	METHOD	UNIT	6" x 24"	6" x 36"
THICKNESS		mm – in	9 mm – 11/32"	9 mm – 11/32"
WATER ABSORPTION	EN ISO 10545-3	(%)	≤ 0.5	≤ 0.5
ABRASION RESISTANCE	EN ISO 10545-7	(PEI)	4	4
SCRATCH HARDNESS		(Mohs)	7	7
BREAKING STRENGTH	EN ISO 10545-4	(lbf)	≥ 300	≥ 300
CHEMICAL RESISTANCE	EN ISO 10545-13	(GL)	Class A – Resistant	Class A – Resistant
FROST RESISTANCE	EN ISO 10545-12		Resistant	Resistant
STATIC COEFFICIENT OF FRICTION (WET)	ASTM C-1028	(μ)	≥ 0.60	≥ 0.60
STATIC COEFFICIENT OF FRICTION (DRY)	ASTM C-1028	(μ)	≥ 0.60	≥ 0.60
DCOF (WET)	ANSI B101.3		≥ 0.50	≥ 0.50
SHADE VARIATION			V4	V4