

CENTURY WOOD HD PORCELAIN TILE



## CENTURY WOOD HD PORCELAIN TILE



6" x 36" CENTURY WOOD DUNE HD RECTIFIED PORCELAIN TILE

## CENTURY WOOD HD PORCELAIN TILE



6" x 36" CENTURY WOOD ASH HD RECTIFIED PORCELAIN TILE

## CENTURY WOOD HD PORCELAIN TILE



6" x 24" CENTURY WOOD SADDLE HD RECTIFIED PORCELAIN TILE

## CENTURY WOOD HD PORCELAIN TILE



6" x 36" CENTURY WOOD DUNE HD RECTIFIED PORCELAIN TILE  
62-722




6" x 24" CENTURY WOOD DUNE HD RECTIFIED PORCELAIN TILE  
62-526



6" x 36" CENTURY WOOD ASH HD RECTIFIED PORCELAIN TILE  
62-721



6" x 24" CENTURY WOOD ASH HD RECTIFIED PORCELAIN TILE  
62-525

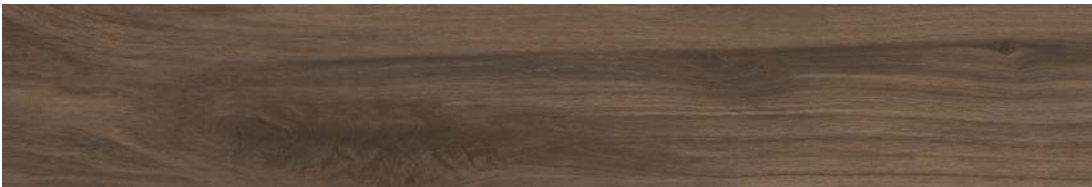

6" x 36" CENTURY WOOD SADDLE HD RECTIFIED PORCELAIN TILE  
62-720



6" x 24" CENTURY WOOD SADDLE HD RECTIFIED PORCELAIN TILE  
62-524

## CENTURY WOOD HD PORCELAIN TILE



6" x 36" CENTURY WOOD CINNAMON HD RECTIFIED PORCELAIN TILE  
62-719



6" x 24" CENTURY WOOD CINNAMON HD RECTIFIED PORCELAIN TILE  
62-523



6" x 24" CENTURY WOOD CINNAMON HD RECTIFIED PORCELAIN TILE

## CENTURY WOOD HD PORCELAIN TILE

### PACKAGING INFORMATION

DESCRIPTION	ITEM CODE	LBS/BOX	PCS/BOX	SQFT/BOX	BOXES/SKID	SQFT/SKID
6" x 36" CENTURY WOOD DUNE HD RECTIFIED PORCELAIN TILE	62-722	39.83	6	8.51	60	510.60
6" x 24" CENTURY WOOD DUNE HD RECTIFIED PORCELAIN TILE	62-526	46.68	11	10.32	48	495.36
6" x 36" CENTURY WOOD ASH HD RECTIFIED PORCELAIN TILE	62-721	39.83	6	8.51	60	510.60
6" x 24" CENTURY WOOD ASH HD RECTIFIED PORCELAIN TILE	62-525	46.68	11	10.32	48	495.36
6" x 36" CENTURY WOOD SADDLE HD RECTIFIED PORCELAIN TILE	62-720	39.83	6	8.51	60	510.60
6" x 24" CENTURY WOOD SADDLE HD RECTIFIED PORCELAIN TILE	62-524	46.68	11	10.32	48	495.36
6" x 36" CENTURY WOOD CINNAMON HD RECTIFIED PORCELAIN TILE	62-719	39.83	6	8.51	60	510.60
6" x 24" CENTURY WOOD CINNAMON HD RECTIFIED PORCELAIN TILE	62-523	46.68	11	10.32	48	495.36

### GENERAL SPECIFICATIONS

DESCRIPTION	METHOD	UNIT	6" x 24"	6" x 36"
THICKNESS		mm – in	9.8 mm – 3/8 in	11 mm – 7/16 in
WATER ABSORPTION	EN ISO 10545-3	( % )	≤ 0.5	≤ 0.5
ABRASION RESISTANCE	EN ISO 10545-7	(PEI)	4	4
SCRATCH HARDNESS		(Mohs)	7	7
BREAKING STRENGTH	EN ISO 10545-4	(lbf)	≥ 292	≥ 292
CHEMICAL RESISTANCE	EN ISO 10545-13	(GL)	Class A – Resistant	Class A – Resistant
FROST RESISTANCE	EN ISO 10545-12		Resistant	Resistant
STATIC COEFFICIENT OF FRICTION (WET)	ASTM C-1028	(μ)	≥ 0.80	≥ 0.80
STATIC COEFFICIENT OF FRICTION (DRY)	ASTM C-1028	(μ)	≥ 0.90	≥ 0.90
DCOF (WET)	ANSI B101.3		≥ 0.60	≥ 0.60
SHADE VARIATION			V2	V2