


FUSION POLISHED DOUBLE LOADED PORCELAIN TILE



FUSION POLISHED DOUBLE LOADED PORCELAIN TILE



12" x 24" FUSION IVORY DOUBLE LOADED POLISHED PORCELAIN TILE
69-156

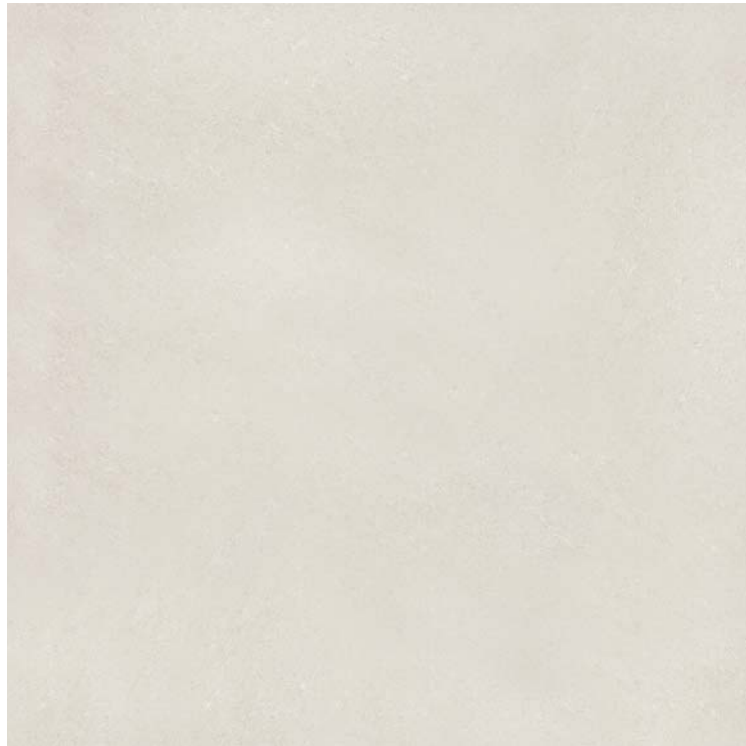

24" x 24" FUSION IVORY DOUBLE LOADED POLISHED PORCELAIN TILE
69-310

FUSION POLISHED DOUBLE LOADED PORCELAIN TILE

PACKAGING INFORMATION

DESCRIPTION	ITEM CODE	LBS/BOX	PCS/BOX	SQFT/BOX	BOXES/SKID	SQFT/SKID
12" x 24" FUSION IVORY POLISHED DOUBLE LOADED PORCELAIN TILE	69-156	65.75	8	16	32	512.00
24" x 24" FUSION IVORY POLISHED DOUBLE LOADED PORCELAIN TILE	69-310	65.80	4	16	30	480.00

GENERAL SPECIFICATIONS

DESCRIPTION	METHOD	UNIT	12" x 24"	24" x 24"
THICKNESS		mm – in	9.2 mm – 3/8"	9.2 mm – 3/8"
WATER ABSORPTION	EN ISO 10545-3	(%)	≤ 0.5	≤ 0.5
DEEP ABRASION	EN ISO 10545-6	(mm ³)	133	133
SCRATCH HARDNESS		(Mohs)	6	6
BREAKING STRENGTH	EN ISO 10545-4	(lbf)	≥ 400	≥ 400
CHEMICAL RESISTANCE	EN ISO 10545-13	(UL)	Class B – Resistant	Class B – Resistant
FROST RESISTANCE	EN ISO 10545-12		Resistant	Resistant
STATIC COEFFICIENT OF FRICTION (WET)	ASTM C-1028	(μ)	< 0.60	< 0.60
STATIC COEFFICIENT OF FRICTION (DRY)	ASTM C-1028	(μ)	≥ 0.40	≥ 0.40
DCOF (WET)	ANSI B101.3		< 0.42	< 0.42
SHADE VARIATION			V1	V1